



CROSS FLOW HEAT EXCHANGER

MODEL H2

PRODUCT DATA SHEET

Model H2 is our most efficient cross flow plate heat exchanger. It combines low-weight with high differential pressure resistance and is able to reach typical dry temperature efficiencies above 80%.

The efficiency is improved by its slim profiles and our latest patented plate design, creating high turbulence even at lower velocities while keeping pressure drop low.

A wide range of options including painted frame work, epoxy coated plates and closed plate cutting edges will improve corrosion resistance and minimize air leakage even further. Custom made accessories like bypass and dampers are available for all our cross flow heat exchangers.

Model H2's performance is certified according to Eurovent, AHRI and TüvSüd. It can easily be configured to comply with Ecodesign 1253/2014 requirements.

All Heatex cross flow plate heat exchangers meet several hygiene requirements.

TECHNICAL SPECIFICATIONS

MODEL H2

COMBINED MODULE SIZE:

19.69" - 118.1"

PLATE SIZE:

19.69" / 23.62" / 27.56" / 29.53" / 33.46" / 39.37" / 47.24"

PLATE MATERIAL:

Aluminum
Epoxy coated aluminium (improved corrosion protection)

GABLES:

Aluzinc
Aluminum

CORNER PROFILES:

Aluminium 90°
Aluminium 45°

MAXIMUM ALLOWED TEMPERATURE AND SEALING:

190°F - Silicone free
390°F - Silicone
464°F - Silicone

MAXIMUM LEAKAGE (AT 400 PA DIFF. PRESSURE):


0.1% of nominal air flow
1% of nominal airflow with silicone sealant

MAXIMUM ALLOWED DIFFERENTIAL PRESSURE:

7.23" WC - 12" WC, depending on plate spacing
> 12" WC for plate spacing above 0.16" WC

For H2 1200/2400:

6" WC - 7.23" WC for plate spacing 0.08" - 0.12"
> 12" WC for plate spacing above 0.16"

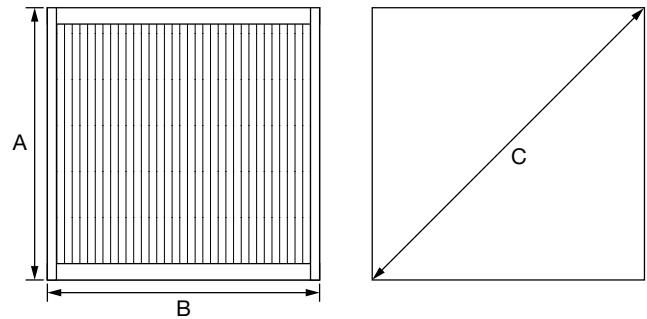

MODEL H2 RANGE

MODEL	MEASURE (INCHES)				PLATE DISTANCE (INCHES)
	A	B*	C45**	C90***	
500	19.69	9.84-39.37	27.09	27.83	0.075 / 0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
600	23.62	9.84-47.24	32.64	33.43	0.075 / 0.079 / 0.087 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
700	27.56	11.81-47.24	38.19	38.98	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
750	29.53	11.81-47.24	40.98	41.77	0.079 / 0.083 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
850	33.45	11.81-47.24	46.54	47.32	0.079 / 0.083 / 0.087 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
1000	39.37	13.78-47.24	54.88	55.67	0.079 / 0.098 / 0.11 / 0.12 / 0.16 / 0.20 / 0.24
1200	47.24	13.78-47.24	On request	66.81	0.079 / 0.1 / 0.106 / 0.11 / 0.12 / 0.16 / 0.20 / 0.24 / 0.34 / 0.39
1400	55.12	13.78-47.24	77.17	77.95	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
1500	59.06	13.78-47.24	82.76	83.54	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
1700	66.93	13.78-47.24	93.86	94.64	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
2000	78.74	13.78-47.24	110.06	111.34	0.079 / 0.098 / 0.12 / 0.16 / 0.17 / 0.19 / 0.20 / 0.24
2250	88.58	13.78-47.24	124.5	125.28	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24
2400	94.49	13.78-47.24	132.8	133.60	0.079 / 0.1 / 0.106 / 0.11 / 0.12 / 0.16 / 0.20 / 0.22 / 0.24 / 0.34 / 0.39
2550	100.39	13.78-47.24	141.2	141.97	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.22 / 0.24
3000	118.11	13.78-47.24	166.3	167.05	0.079 / 0.098 / 0.12 / 0.16 / 0.20 / 0.24

* Maximum module width depends on plate orientation (vertical or horizontal), model and plate distance.

** 45° corner profile.

*** 90° corner profile.

Owing to continued product development Heatex reserves the right to introduce alterations without prior notice.