


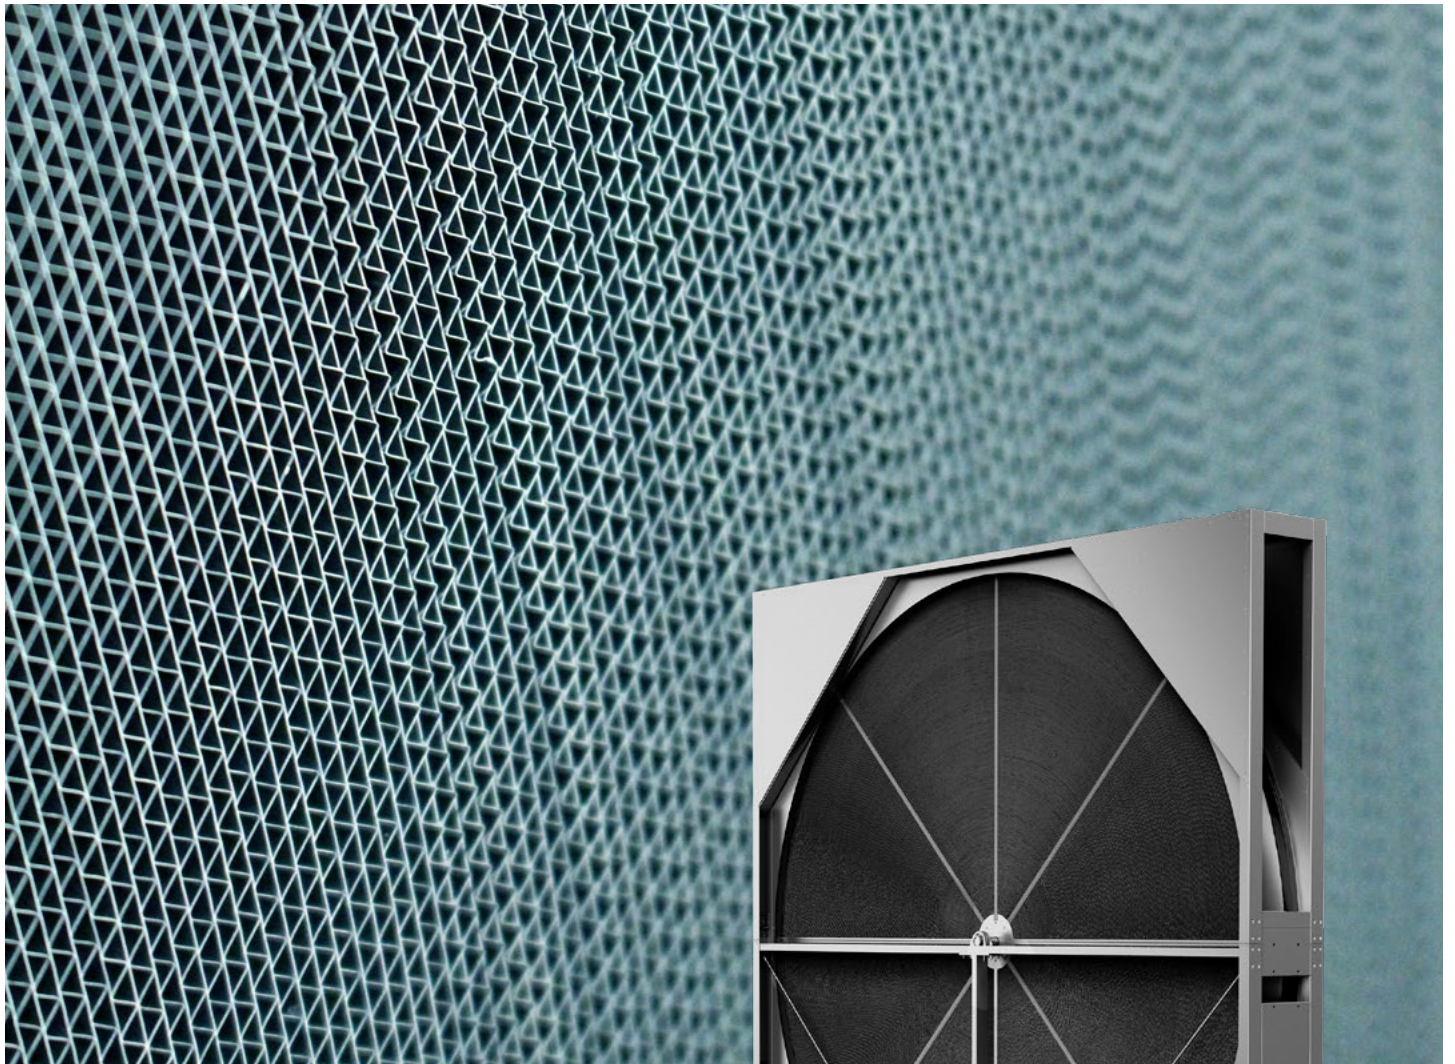

ROTARY HEAT EXCHANGER

MODEL EQ

PRODUCT DATA SHEET

Model EQ is a high-performing, segmented rotary heat exchanger in a robust galvanized steel casing for industrial and marine ventilation applications. Typical temperature efficiencies are up to 90%.

Thanks to its segmented wheel Model EQ facilitates onsite installation or replacement in narrow spaces. It also provides for lower transportation costs.

It is possible to make adjustments to the position of the shaft in all directions for a perfectly balanced fit in the air handling unit.

Air leakage between wheel and casing is minimized with a brush seal allowing easy adjustment, longer lifetime and low friction. The two air streams are also separated by adjustable brush sealants.

Model EQ is certified according to AHRI.

Only the wheel, without casing, is called Model EV.

AIR-TO-AIR HEAT EXCHANGERS

HEATEX

TECHNICAL SPECIFICATIONS

MODEL EQ

SIZE Ø:

- 47.24" - 149.61"

CASING DEPTH:

- 17.95" (for Ø 62.99" – 74.80")
- 18.11" (for Ø 74.84" – 110.2")
- 19.69" (for Ø 110.3" – 149.6")

MATRIX MATERIAL:

- Aluminum (Condensation)
- Epoxy (Condensation)
- Hybrid with silica gel (Enthalpy)
- Hybrid with molecular sieve (Enthalpy)
- Silica gel (Adsorption)
- Molecular sieve (Adsorption)

CASING:

- Standard
- Covered

HUB:

- Fixed shaft for external bearings
- Fixed shaft for internal bearings

SEALING:

- Brush seal

DRIVE UNIT:

- Drive and control (VFD)
- Inverter ready constant drive

EXCHANGER ORIENTATION:

- Vertical only

TYPICAL AIRFLOWS:

- 1 170 - 110 000 CFM

MAX. ALLOWED PRESSURE DROP:

- 1" WC

MODEL EQ STANDARD DIMENSIONS*

WHEEL Ø (INCHES)	CASING (INCHES)		WELL HEIGHT VERSION**
	FRONT	DEPTH	
62.99	68.50x68.50	17.95	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
66.93	72.44x72.44	17.95	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
70.87	76.38x76.38	17.95	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
74.80	80.31x80.31	17.95	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
78.74	84.25x84.25	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
82.68	88.19x88.19	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
86.61	92.13x92.13	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
90.55	96.06x96.06	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
94.49	100.00x100.00	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
98.43	103.94x103.94	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
102.36	107.87x107.87	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
106.30	111.81x111.81	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
110.24	115.75x115.75	18.11	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
114.17	119.69x119.69	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
118.11	123.62x123.62	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
122.05	127.56x127.56	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
125.98	131.50x131.50	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
129.92	135.43x135.43	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
133.86	139.37x139.37	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
137.80	143.31x143.31	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
141.73	147.24x147.24	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
145.67	151.18x151.18	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098
149.61	155.12x155.12	19.69	0.055 / 0.063 / 0.071 / 0.079 / 0.087 / 0.098

*Other wheel dimensions (between 62.99" and 149.61") are available upon request. Larger casings than minimum are possible.

** The exact well height depends on the thickness of the material selected. See technical manual for exact dimensions.

Owing to continued product development Heatex reserves the right to introduce alterations without prior notice.